



QUALITY
RELIABILITY
BENEFIT

STEELBO
A company driven
by innovation

2026



CONTENTS

01	KNEE JOINTS	05-16
02	HIP JOINTS	17-21
03	PROSTHETIC FEET	22-27
04	PROSTHETIC LINERS	28-32
05	SOCKET LAMINATION ADAPTERS	33-36
06	TUBE ADAPTERS	36-37
07	EXTENSION ADAPTERS	37-39
08	CONNECTING ADAPTERS	40-42
09	FOOT ADAPTERS	42
10	ROTATIONAL ADAPTERS	43
11	LOCKS	43-44
12	ORTHOPEDIC TEXTILES	44-45



ABOUT THE COMPANY

Steelbo – your trusted solutions in the medical industry.

We are a Polish manufacturing and trading company that has been delivering top-quality solutions for the medical and industrial sectors for years. Our main activity is the production of medical devices and providing services in precision CNC machining.

We are distinguished by a team of international specialists with many years of professional experience, both in executing advanced projects and in organizing workflows. We regularly participate in prestigious industry trade shows, which allows us to showcase our products and services, gain inspiration, and establish collaborations with market leaders.

Innovation, quality, and professionalism are our priorities.

Sincerely, the STEELBO Team!



Modern Production of Prosthetic Components at Steelbo

At Steelbo, we believe that precision in manufacturing and reliability in performance are crucial in every field of medical engineering – especially in prosthetics. That is why we have been developing our own line of knee adapters and modules for years, based on modern technological solutions.

Our components are manufactured using:

- Advanced CNC machining centers that ensure high precision.
- Laser marking technology, enabling permanent identification and compliance with CE requirements.
- Multi-stage quality control systems, ensuring the reliability of finished products.

Production takes place in Poland, using certified materials and adhering to the highest European standards.

Every component leaving our factory is the result of dedication, experience, and a passion for innovation.

Steelbo represents quality you can trust.



We care not only about technical performance but also about the aesthetics of the finish and the functionality of the design. This ensures that our products meet the expectations of even the most demanding clients – both orthopedic specialists and end users.





RAVEN CR

Hydraulic knee joint with geometric lock

TECHNICAL DATA

■ Material	Aluminum/Stainless steel
■ Maximum flexion angle°	145
■ Knee joint type	Hydraulic
■ Mobility level	2-3
■ Product weight [kg]	0,856
■ Maximum user weight [kg]	125



3-Year
Warranty



EAGLE MK

Hydraulic knee joint with braking lock

TECHNICAL DATA

■ Material	Aluminum / Titanium / Stainless steel
■ Maximum flexion angle°	135
■ Knee joint type	Hydraulic
■ Mobility level	2-4
■ Product weight [kg]	1,1
■ Maximum user weight [kg]	100





M1.ZZ

Mechanical waterproof knee joint with lock

TECHNICAL DATA

■ Material	Aluminum/Stainless steel
■ Maximum flexion angle°	140
■ Knee joint type	Mechanical
■ Mobility level	1-2
■ Product weight [kg]	0,291
■ Maximum user weight [kg]	125



Waterproof



3-Year
Warranty



M10.ZZ

Mechanical waterproof knee joint with lock

TECHNICAL DATA

- Material
- Maximum flexion angle°
- Knee joint type
- Mobility level
- Product weight [kg]
- Maximum user weight [kg]

Aluminum/Stainless steel
140
Mechanical
1-2
0,310
125



Waterproof



3-Year
Warranty



M4.BZ

Mechanical waterproof knee joint

TECHNICAL DATA

■ Material	Aluminum/Stainless steel
■ Maximum flexion angle°	150
■ Knee joint type	Mechanical
■ Mobility level	1-3
■ Product weight [kg]	0,558
■ Maximum user weight [kg]	125



Waterproof



3-Year
Warranty



M4.ZZ

Mechanical waterproof knee joint with lock

TECHNICAL DATA

■ Material	Aluminum/Stainless steel
■ Maximum flexion angle°	150
■ Knee joint type	Mechanical
■ Mobility level	1-3
■ Product weight [kg]	0,588
■ Maximum user weight [kg]	125



Waterproof



3-Year
Warranty



P5.KM

Pneumatic knee joint with geometric lock

TECHNICAL DATA

■ Material	Aluminum alloy/Stainless steel
■ Maximum flexion angle°	135
■ Knee joint type	Mechanical
■ Mobility level	2-3
■ Product weight [kg]	0,950
■ Maximum user weight [kg]	125





P4.PQ

Pneumatic knee joint

TECHNICAL DATA

■ Material	Aluminum alloy/Stainless steel
■ Maximum flexion angle°	140
■ Knee joint type	Pneumatic
■ Mobility level	2-3
■ Product weight [kg]	0,823
■ Maximum user weight [kg]	125



3-Year
Warranty



PRO4HD.503

Hydraulic knee joint with friction lock

TECHNICAL DATA

■ Material	Aluminum
■ Maximum flexion angle°	135
■ Knee joint type	Hydraulic
■ Mobility level	3
■ Product weight [kg]	1,003
■ Maximum user weight [kg]	100



2-Year
Warranty



PRO4.PO.MO2

Polycentric pneumatic knee joint

TECHNICAL DATA

■ Material	Aluminum
■ Maximum flexion angle°	145
■ Mobility level	3
■ Proximal connection	Pyramid Adapter
■ Distal connection	Tube Adapter
■ System Height [mm]	153
■ Product weight [kg]	0,640
■ Maximum user weight [kg]	100



2-Year
Warranty



C-TK-4000S

Mechanical knee joint

TECHNICAL DATA

■ Material	Aluminum
■ Maximum flexion angle°	135
■ Joint type	Polycentric
■ Mobility level	1-2
■ Product weight [kg]	0,835
■ Maximum user weight [kg]	125



2-Year
Warranty



C-TK-4001S

Mechanical knee joint with lock

TECHNICAL DATA

■ Material	Aluminum
■ Maximum flexion angle°	120
■ Knee joint type	Polycentric
■ Mobility level	1-2
■ Product weight [kg]	0,880
■ Maximum user weight [kg]	125





C-TK-4POOS

Pneumatic knee joint with four-bar linkage mechanism

TECHNICAL DATA

■ Material	Metal Alloy
■ Maximum flexion angle°	140
■ Knee joint type	Pneumatic
■ Mobility level	2-3
■ Product weight [kg]	1,250
■ Maximum user weight [kg]	100



2-Year
Warranty



C-RAY-RP1

Rayome pneumatic knee joint with four-bar linkage

TECHNICAL DATA

■ Material	Aluminum, Titanium Alloy
■ Maximum flexion angle°	159
■ Knee joint type	Pneumatic
■ Mobility level	2-3
■ Product weight [kg]	1,146
■ Maximum user weight [kg]	125



2-Year
Warranty



SBM-1

Mechanical hip joint

TECHNICAL DATA

■ Material	Aluminum
■ Maximum flexion angle°	115
■ Joint type	Polycentric
■ Mobility level	2-3
■ Build height [mm]	192
■ Product weight [kg]	0,820
■ Maximum user weight [kg]	100



3-Year
Warranty



PRO4.K7

Hydraulic hip joint

TECHNICAL DATA

■ Main body material	Aluminum alloy
■ Maximum flexion angle°	140
■ Joint type	Monocentric
■ Mobility level	2-3
■ Build height [mm]	130
■ Product weight [kg]	0,750
■ Maximum user weight [kg]	125



2-Year
Warranty



A-TGH-01

Mechanical hip joint

TECHNICAL DATA

■ Material	Carbon fiber
■ Maximum flexion angle°	115
■ Joint type	Monocentric
■ Mobility level	2-3
■ Build height [mm]	250
■ Product weight [kg]	0,600
■ Maximum user weight [kg]	100





PRO1.K5.ASYA

Carbon fiber prosthetic foot ASYA



PRO1.KL.LARA

Carbon fiber prosthetic foot LARA

TECHNICAL DATA

- Maximum user weight [kg]
- Sizes [cm]
- Available
- Mobility level

Up to 125
22-30
Left/right
3-4



2-Year
Warranty

NAME	SIZE	SIDE
PRO1.K5.22L	22	(L) Left
PRO1.K5.22R	22	(R) Right
PRO1.K5.23L	23	(L) Left
PRO1.K5.23R	23	(R) Right
PRO1.K5.24L	24	(L) Left
PRO1.K5.24R	24	(R) Right
PRO1.K5.25L	25	(L) Left
PRO1.K5.25R	25	(R) Right
PRO1.K5.26L	26	(L) Left
PRO1.K5.26R	26	(R) Right
PRO1.K5.27L	27	(L) Left
PRO1.K5.27R	27	(R) Right
PRO1.K5.28L	28	(L) Left
PRO1.5L.28R	28	(R) Right
PRO1.K5.29L	29	(L) Left
PRO1.K5.29R	29	(R) Right
PRO1.K5.30L	30	(L) Left
PRO1.K5.30R	30	(R) Right

NAME	SIZE	SIDE
PRO1.KL.22L	22	(L) Left
PRO1.KL.22R	22	(R) Right
PRO1.KL.23L	23	(L) Left
PRO1.KL.23R	23	(R) Right
PRO1.KL.24L	24	(L) Left
PRO1.KL.24R	24	(R) Right
PRO1.KL.25L	25	(L) Left
PRO1.KL.25R	25	(R) Right
PRO1.KL.26L	26	(L) Left
PRO1.KL.26R	26	(R) Right
PRO1.KL.27L	27	(L) Left
PRO1.KL.27R	27	(R) Right
PRO1.KL.28L	28	(L) Left
PRO1.KL.28R	28	(R) Right
PRO1.KL.29L	29	(L) Left
PRO1.KL.29R	29	(R) Right
PRO1.KL.30L	30	(L) Left
PRO1.KL.30R	30	(R) Right



SPORTS

TECHNICAL DATA

■ Material	Carbon fiber
■ Sizes	-
■ Categories	8
■ Build height [mm]	280
■ Weight (size 26) [g]	645
■ Resistance	Freshwater and saltwater
■ Maximum user weight [kg]	120
■ Activity level/Intended use	Recreational and general sports use



Reference number

SP-280-S-1-AR

Model



Build height [mm]



Connection type

G: Bonded sole
S: Screw-mounted sole



Category


See next page



VISION MP

TECHNICAL DATA

■ Material	Colored fiberglass
■ Sizes	23-29
■ Categories	5
■ Build height [mm]	98
■ Weight (size 26) [g]	397
■ Resistance	Freshwater and saltwater
■ Maximum user weight [kg]	160
■ Activity level/Intended use	1-2

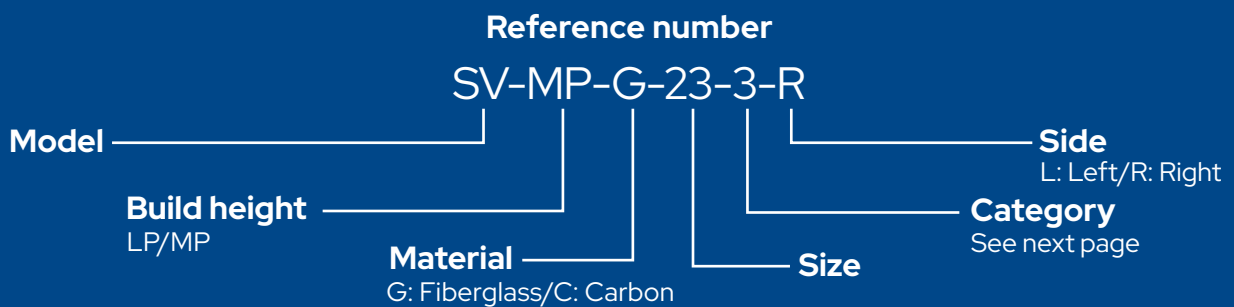



VISION LP

TECHNICAL DATA

■ Material	Carbon
■ Sizes	23-29
■ Categories	5
■ Build height [mm]	62
■ Weight (size 26) [g]	292
■ Resistance	Freshwater and saltwater
■ Maximum user weight [kg]	125
■ Activity level/Intended use	2-3



Reference number

SV-LP-C-23-3-R

Model

Build height
LP/MP

Material
G: Fiberglass/C: Carbon

Size

Side

L: Left/R: Right


Category
See next page



VISION LP

TECHNICAL DATA

■ Material	Fiberglass
■ Sizes	23-29
■ Categories	5
■ Build height [mm]	62
■ Weight (size 26) [g]	330
■ Resistance	Freshwater and saltwater
■ Maximum user weight [kg]	140
■ Activity level/Intended use	1-3

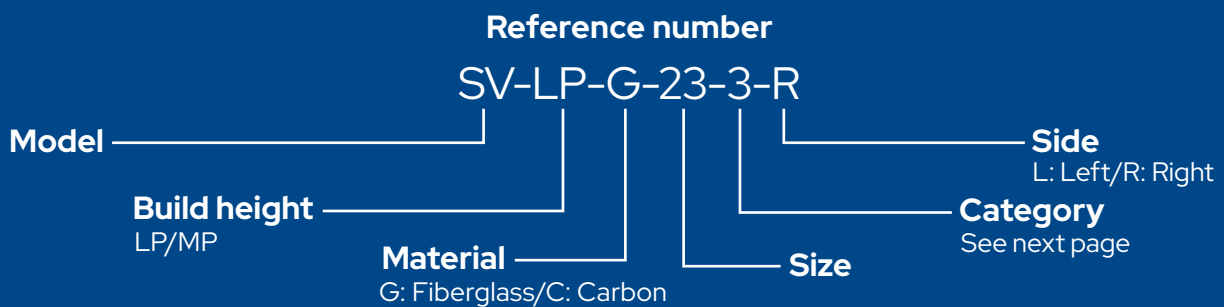



SPORTS

USER WEIGHT	EXPERIENCE LEVEL	
	LOW	HIGH
40-50 kg	Category 1	Category 2
51-60 kg	Category 2	Category 3
61-70 kg	Category 3	Category 4
71-80 kg	Category 4	Category 5
81-90 kg	Category 5	Category 6
91-100 kg	Category 6	Category 7
101-110 kg	Category 7	Category 8
111-120 kg	Category 8	N/A

VISION MP

USER WEIGHT	50-70 kg	71-91 kg	92-112 kg	113-133 kg	134-160 kg
Size 23					
Size 24					
Size 25					
Size 26					
Size 27					
Size 28					
Size 29					
Category	1	2	3	4	5



VISION LP

USER WEIGHT	48-59 kg	60-72 kg	73-87 kg	88-103 kg	104-125 kg
Size 23					
Size 24					
Size 25					
Size 26					
Size 27					
Size 28					
Size 29					
Category	1	2	3	4	5

VISION LP

USER WEIGHT	50-65 kg	66-82 kg	83-99 kg	100-118 kg	119-140 kg
Size 23					
Size 24					
Size 25					
Size 26					
Size 27					
Size 28					
Size 29					
Category	1	2	3	4	5




6-Month
Warranty

COMFORT SIL LOCKING

Silicone locking liner

3 mm

Reference number	Size
120-CL-1-330-16	160 mm
120-CL-1-330-18	180 mm
120-CL-1-330-20	200 mm
120-CL-1-330-21	210 mm
120-CL-1-330-22	220 mm
120-CL-1-330-23.5	235 mm
120-CL-1-330-25	250 mm
120-CL-1-330-26.5	265 mm
120-CL-1-330-28	280 mm
120-CL-1-330-30	300 mm
120-CL-1-330-32	320 mm
120-CL-1-330-34	340 mm
120-CL-1-330-36	360 mm
120-CL-1-330-38	380 mm
120-CL-1-330-40	400 mm
120-CL-1-330-42	420 mm
120-CL-1-330-45	450 mm




6-Month
Warranty

COMFORT SIL CUSHION

Silicone cushion liner

3 mm

Reference number	Size
120-CC-1-330-16	160 mm
120-CC-1-330-18	180 mm
120-CC-1-330-20	200 mm
120-CC-1-330-21	210 mm
120-CC-1-330-22	220 mm
120-CC-1-330-23.5	235 mm
120-CC-1-330-25	250 mm
120-CC-1-330-26.5	265 mm
120-CC-1-330-28	280 mm
120-CC-1-330-30	300 mm
120-CC-1-330-32	320 mm
120-CC-1-330-34	340 mm
120-CC-1-330-36	360 mm
120-CC-1-330-38	380 mm
120-CC-1-330-40	400 mm
120-CC-1-330-42	420 mm
120-CC-1-330-45	450 mm




6-Month
Warranty

COMFORT SIL TF

Silicone locking liner TF

Thigh padding

Reference number	Size
120-CTF-1-240-25	250 mm
120-CTF-1-240-26,5	265 mm
120-CTF-1-240-28	280 mm
120-CTF-1-240-30	300 mm
120-CTF-1-240-32	320 mm
120-CTF-1-240-34	340 mm
120-CTF-1-240-36	360 mm
120-CTF-1-240-38	380 mm
120-CTF-1-240-40	400 mm
120-CTF-1-240-42	420 mm
120-CTF-1-240-45	450 mm
120-CTF-1-240-50	500 mm
120-CTF-1-240-55	550 mm




6-Month
Warranty

COMFORT SIL

Silicone liner with lock

6 mm

Reference number	Size
120-CL-1-630-16	160 mm
120-CL-1-630-18	180 mm
120-CL-1-630-20	200 mm
120-CL-1-630-21	210 mm
120-CL-1-630-22	220 mm
120-CL-1-630-23.5	235 mm
120-CL-1-630-25	250 mm
120-CL-1-630-26.5	265 mm
120-CL-1-630-28	280 mm
120-CL-1-630-30	300 mm
120-CL-1-630-32	320 mm
120-CL-1-630-34	340 mm
120-CL-1-630-36	360 mm
120-CL-1-630-38	380 mm
120-CL-1-630-40	400 mm
120-CL-1-630-42	420 mm
120-CL-1-630-45	450 mm

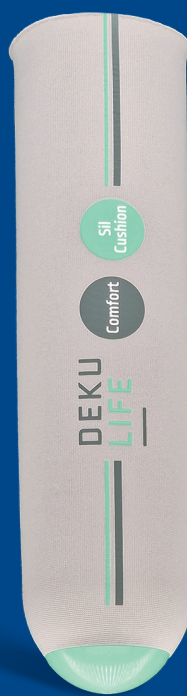

6-Month
Warranty

COMFORT SIL

Silicone liner

6 mm

Reference number	Size
120-CC-1-630-16	160 mm
120-CC-1-630-18	180 mm
120-CC-1-630-20	200 mm
120-CC-1-630-21	210 mm
120-CC-1-630-22	220 mm
120-CC-1-630-23.5	235 mm
120-CC-1-630-25	250 mm
120-CC-1-630-26.5	265 mm
120-CC-1-630-28	280 mm
120-CC-1-630-30	300 mm
120-CC-1-630-32	320 mm
120-CC-1-630-34	340 mm
120-CC-1-630-36	360 mm
120-CC-1-630-38	380 mm
120-CC-1-630-40	400 mm
120-CC-1-630-42	420 mm
120-CC-1-630-45	450 mm



6-Month
Warranty

UNIVERSAL SIL

Silicone liner with lock

3 mm

Reference number	Size
120-UL-1-340-16	160 mm
120-UL-1-340-18	180 mm
120-UL-1-340-20	200 mm
120-UL-1-340-21	210 mm
120-UL-1-340-22	220 mm
120-UL-1-340-23.5	235 mm
120-UL-1-340-25	250 mm
120-UL-1-340-26.5	265 mm
120-UL-1-340-28	280 mm
120-UL-1-340-30	300 mm
120-UL-1-340-32	320 mm
120-UL-1-340-34	340 mm
120-UL-1-340-36	360 mm
120-UL-1-340-38	380 mm
120-UL-1-340-40	400 mm
120-UL-1-340-42	420 mm
120-UL-1-340-45	450 mm



6-Month Warranty

UNIVERSAL SIL

Silicone liner

3 mm

Reference number	Size
120-UC-1-340-16	160 mm
120-UC-1-340-18	180 mm
120-UC-1-340-20	200 mm
120-UC-1-340-21	210 mm
120-UC-1-340-22	220 mm
120-UC-1-340-23.5	235 mm
120-UC-1-340-25	250 mm
120-UC-1-340-26.5	265 mm
120-UC-1-340-28	280 mm
120-UC-1-340-30	300 mm
120-UC-1-340-32	320 mm
120-UC-1-340-34	340 mm
120-UC-1-340-36	360 mm
120-UC-1-340-38	380 mm
120-UC-1-340-40	400 mm
120-UC-1-340-42	420 mm
120-UC-1-340-45	450 mm



6-Month Warranty

COMFORT GEL

Gel liner with lock

3 mm, 6 mm, 9 mm

Reference number	Size
3 mm	
12 5-CL-1-330-S	S
12 5-CL-1-330-M	M
12 5-CL-1-330-L	L
12 5-CL-1-330-XL	XL
12 5-CL-1-330-XXL	XXL
6 mm	
12 5-CL-1-6 30-S	S
12 5-CL-1-6 30-M	M
12 5-CL-1-6 30-L	L
12 5-CL-1-6 30-XL	XL
12 5-CL-1-6 30-XXL	XXL
9 mm	
12 5-CL-1-9 30-S	S
12 5-CL-1-9 30-M	M
12 5-CL-1-9 30-L	L
12 5-CL-1-9 30-XL	XL
12 5-CL-1-9 30-XXL	XXL



6-Month Warranty

COMFORT GEL

Gel liner

3 mm, 6 mm, 9 mm

Reference number	Size
3 mm	
12 5-CC-1-330-S	S
12 5-CC-1-330-M	M
12 5-CC-1-330-L	L
12 5-CC-1-330-XL	XL
12 5-CC-1-330-XXL	XXL
6 mm	
12 5-CC-1-6 30-S	S
12 5-CC-1-6 30-M	M
12 5-CC-1-6 30-L	L
12 5-CC-1-6 30-XL	XL
12 5-CC-1-6 30-XXL	XXL
9 mm	
12 5-CC-1-9 30-S	S
12 5-CC-1-9 30-M	M
12 5-CC-1-9 30-L	L
12 5-CC-1-9 30-XL	XL
12 5-CC-1-9 30-XXL	XXL



6-Month
Warranty

PR30 FC

Silicone liner with lock

3 mm

Reference number	Size
PR30.FC.314	140 mm
PR30.FC.316	160 mm
PR30.FC.318	180 mm
PR30.FC.320	200 mm
PR30.FC.322	220 mm
PR30.FC.323	235 mm
PR30.FC.325	250 mm
PR30.FC.326	265 mm
PR30.FC.328	280 mm
PR30.FC.330	300 mm
PR30.FC.332	320 mm
PR30.FC.334	340 mm
PR30.FC.336	360 mm
PR30.FC.338	380 mm
PR30.FC.340	400 mm
PR30.FC.342	420 mm
PR30.FC.345	450 mm
PR30.FC.347	470 mm
PR30.FC.352	520 mm



6-Month
Warranty

PR30 FC

Silicone liner with lock

6 mm

Reference number	Size
PR30.FC.618	180 mm
PR30.FC.620	200 mm
PR30.FC.622	220 mm
PR30.FC.625	235 mm
PR30.FC.626	265 mm
PR30.FC.628	280 mm
PR30.FC.630	300 mm
PR30.FC.632	320 mm
PR30.FC.634	340 mm
PR30.FC.636	360 mm
PR30.FC.638	380 mm
PR30.FC.640	400 mm
PR30.FC.642	420 mm
PR30.FC.645	450 mm
PR30.FC.647	470 mm
PR30.FC.652	520 mm



6-Month
Warranty

PR30 FD

Silicone liner

6 mm

Reference number	Size
PR30.FD.618	180 mm
PR30.FD.620	200 mm
PR30.FD.622	220 mm
PR30.FD.625	235 mm
PR30.FD.626	265 mm
PR30.FD.628	280 mm
PR30.FD.630	300 mm
PR30.FD.632	320 mm
PR30.FD.634	340 mm
PR30.FD.636	360 mm
PR30.FD.638	380 mm
PR30.FD.640	400 mm
PR30.FD.642	420 mm
PR30.FD.645	450 mm
PR30.FD.647	470 mm
PR30.FC.652	520 mm



6-Month
Warranty

PR30 FD

Silicone liner

3 mm

Reference number	Size
PR30.FD.314	140 mm
PR30.FD.316	160 mm
PR30.FD.318	180 mm
PR30.FD.320	200 mm
PR30.FD.322	220 mm
PR30.FD.323	235 mm
PR30.FC.325	250 mm
PR30.FD.326	265 mm
PR30.FD.328	280 mm
PR30.FD.330	300 mm
PR30.FD.332	320 mm
PR30.FD.334	340 mm
PR30.FD.336	360 mm
PR30.FD.338	380 mm
PR30.FD.340	400 mm
PR30.FD.342	420 mm
PR30.FD.345	450 mm
PR30.FD.347	470 mm
PR30.FD.352	520 mm



AB-3CR

Socket lamination adapter with rotational adjustment

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-3CR (SS)	Stainless steel	62	24	0,150	125
AB-3CR (TI)	Titanium	52	26	0,095	125



AB-3PR

Socket lamination adapter with rotational adjustment

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-3PR (SS)	Stainless steel	62	28	0,140	125
AB-3PR (TI)	Titanium	52	32	0,089	125



ABPC-1

Adjustable sliding base adapter with rotation

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ABPC-1 (SS)	Stainless steel	66,5	35	0,324	125



ABM-1

Offset base adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	OFFSET [mm]	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ABM-1 (SS)	Stainless steel	7	50	30	0,121	125



AB-1C

Socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-1C (SS)	Stainless steel	67	17	0,129	125
AB-1C (TI)	Titanium	67	17	0,077	125



AB-2P

Socket lamination adapter with male connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-2P (SS)	Stainless steel	52	22	0,086	125
AB-2P (TI)	Titanium	52	22	0,050	125



AB-2C

Socket lamination adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-2C (AL)	Aluminum	53	18	0,059	125
AB-2C (TI)	Titanium	52	15	0,058	125



TK-1

Temporary socket lamination adapter

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
TK-1	Aluminum	74	45	0,245	125



TK-2

Temporary socket lamination adapter

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
TK-2	Aluminum	62	50	0,165	125



AB-CL

Socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AB-CL (AL)	Aluminum	55	25	0,105	125
AB-CL (TI)	Titanium	55	25	0,156	125



SPIDER SC

Socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER SC (SS)	Stainless steel	79	40	0,153	125



SPIDER SP

Socket lamination adapter with male connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER SP (SS)	Stainless steel	79	44	0,152	125



SPIDER LC

Socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER LC (SS)	Stainless steel	124	55	0,227	125
SPIDER LC (TI)	Titanium	112	50	0,158	125



SPIDER LP

Socket lamination adapter with male connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER LP (SS)	Stainless steel	124	60	0,215	125
SPIDER LP (TI)	Titanium	112	60	0,150	125



SPIDER KC

Socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER KC (SS)	Stainless steel	55	26	0,099	125
SPIDER KC (TI)	Titanium	55	26	0,062	125



SPIDER KP

Socket lamination adapter with male connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER KP (SS)	Stainless steel	55	31	0,120	125
SPIDER KP (TI)	Titanium	55	31	0,081	125
SPIDER KP (AL)	Aluminum	64	30	0,063	125



SPIDER KCR

Adjustable rotational socket lamination adapter with female connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER KCR (SS)	Stainless steel	63	35	0,168	125
SPIDER KCR (TI)	Titanium	63	35	0,097	125



SPIDER KPR

Adjustable rotational socket lamination adapter with male connector

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER KPR (SS)	Carbon Steel/ Stainless steel	63	42	0,155	125
SPIDER KPR (TI)	Titanium	63	42	0,085	125



SPIDER KCR/W

Adjustable rotational socket lamination adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
SPIDER KCR/W45 (TI)	Titanium	64	45	0,125	125
SPIDER KCR/W55 (TI)	Titanium	64	55	0,133	125
SPIDER KCR/W70 (TI)	Titanium	64	70	0,150	125

06 TUBE ADAPTERS



AR200/AR400

Tube extension adapter 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AR200 (SS)	Stainless steel	40	202	0,208	125
AR400 (SS)	Stainless steel	40	402	0,316	125



ARW200/ARW400

Carbon fiber tube adapter 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ARW200 (TI)	Titanium	40	202	0,148	125
ARW400 (TI)	Titanium	40	402	0,216	125
ARW200 (AL)	Aluminum	44	220	0,146	125
ARW400 (AL)	Aluminum	44	420	0,191	125



RW200/RW400

Carbon fiber tube 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
RW200	Carbon Fiber	30	200	0,065	125
RW400	Carbon Fiber	30	400	0,128	125



ARA200/ARA400

Tube adapter 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ARA200 (AL)	Aluminum	44	220	0,210	125
ARA400 (AL)	Aluminum	44	420	0,275	125



ARW-1 200/ARW-1 400

Tube adapter 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ARW-1 200 (TI)	Titanium	39	220	0,169	125
ARW-1 400 (TI)	Titanium	39	420	0,229	125

AR-1 200/AR-1 400

Tube adapter 200/400mm

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AR-1 200 (SS)	Stainless steel	39	220	0,207	125
AR-1 400 (SS)	Stainless steel	39	420	0,304	125

ARP-1

Trial tube adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ARP-1(SS)	Stainless steel	40	290-420	0,330	125

07 EXTENSION ADAPTERS



APP-1

Offset extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	OFFSET [mm]	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
APP-1(AL)	Aluminum	5	42	75	0,101	125



APP-2

Offset extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	OFFSET [mm]	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
APP-2 (AL)	Aluminum	5	42	200	0,193	125



DA-PP32

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
DA-PP32 (SS)	Stainless steel	38	32	0,098	125



APW-1

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
APW-1 (SS)	Stainless steel	38	60-75	0,246	125
APW-1 (TI)	Titanium	38	65-75	0,145	125



APW-2

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
APW-2 (TI)	Titanium	43	70-80	0,143	125



AW1-G

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AW1-G40 (SS)	Stainless steel	38	40	0,113	125
AW1-G55 (SS)	Stainless steel	38	55	0,143	125
AW1-G70 (SS)	Stainless steel	38	70	0,165	125



AW2-G

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AW2-G40 (SS)	Stainless steel	38	40	0,113	125
AW2-G55 (SS)	Stainless steel	38	55	0,155	125
AW2-G70 (SS)	Stainless steel	38	70	0,196	125



AP-A

Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AP-A45 (SS)	Stainless steel	38	45	0,102	125
AP-A60 (SS)	Stainless steel	38	60	0,124	125
AP-A75 (SS)	Stainless steel	38	75	0,147	125
AP-A90 (SS)	Stainless steel	38	90	0,165	125
AP-A45 (AL)	Aluminum	44	45	0,064	125
AP-A60 (AL)	Aluminum	44	60	0,073	125
AP-A75 (AL)	Aluminum	44	75	0,082	125
AP-A90 (AL)	Aluminum	44	90	0,091	125



DA-PC
Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
DA-PC32 (SS)	Stainless steel	38	32	0,115	125
DA-PC45 (SS)	Stainless steel	38	45	0,147	125
DA-PC60 (SS)	Stainless steel	38	60	0,193	125
DA-PC75 (SS)	Stainless steel	38	75	0,233	125
DA-PC45 (AL)	Aluminum	44	45	0,113	125
DA-PC60 (AL)	Aluminum	44	60	0,133	125
DA-PC75 (AL)	Aluminum	44	75	0,154	125
DA-PC32 (TI)	Titanium	39	32	0,071	125
DA-PC45 (TI)	Titanium	39	45	0,093	125
DA-PC60 (TI)	Titanium	39	60	0,104	125
DA-PC75 (TI)	Titanium	39	75	0,118	125



DA-CC
Extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
DA-CC32 (SS)	Stainless steel	38	32	0,142	125
DA-CC45 (SS)	Stainless steel	38	45	0,166	125
DA-CC60 (SS)	Stainless steel	38	60	0,200	125
DA-CC75 (SS)	Stainless steel	38	75	0,230	125
DA-CC32 (AL)	Aluminum	44	32	0,098	125
DA-CC45 (AL)	Aluminum	44	45	0,114	125
DA-CC60 (AL)	Aluminum	44	60	0,141	125
DA-CC75 (AL)	Aluminum	44	75	0,157	125
DA-CC32 (TI)	Titanium	39	32	0,092	125
DA-CC45 (TI)	Titanium	39	45	0,103	125
DA-CC60 (TI)	Titanium	39	60	0,114	125
DA-CC75 (TI)	Titanium	39	75	0,126	125



DA-CC/P
Sliding extension adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT RANGE [mm]	MAXIMUM USER WEIGHT [kg]
DA-CC/P45 (AL)	Aluminum	44	45	0,150	-10 to +10	125
DA-CC/P60 (AL)	Aluminum	44	60	0,192	-10 to +10	125
DA-CC/P75 (AL)	Aluminum	44	75	0,233	-10 to +10	125
DA-CC/P45 (TI)	Titanium	39	45	0,163	-10 to +10	125
DA-CC/P60 (TI)	Titanium	39	60	0,202	-10 to +10	125
DA-CC/P75 (TI)	Titanium	39	75	0,225	-10 to +10	125



ALMP

Connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ALMP (SS)	Stainless steel	51	33	0,128	125



ALMC

Connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ALMC (SS)	Stainless steel	35	15	0,049	125



ALMC-2

Connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ALMC-2 (TI)	Titanium	51	26	0,085	125



AWPP-1

Sliding connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT RANGE [mm]	MAXIMUM USER WEIGHT [kg]
AWPP-1 (SS)	Stainless steel	39	45	0,225	-10 to +10	125
AWPP-1 (TI)	Titanium	39	45	0,131	-10 to +10	125



AWPC-1

Sliding connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT RANGE [mm]	MAXIMUM USER WEIGHT [kg]
AWPC-1 (SS)	Stainless steel	43	45	0,253	-10 to +10	125
AWPC-1 (TI)	Titanium	43	45	0,152	-10 to +10	125



ASZ-1

Quick-release adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ASZ-1 (SS)	Stainless steel	50	42	0,252	125



ASZ-2

Quick-release adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ASZ-2 (TI)	Titanium	58	40	0,216	125



QW-1, QP-1, QC-1
Caps for ASZ-2 adapter (TI)

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
QW-1 (TI)	Titanium	38	35	0,073	125
QP-1 (TI)	Titanium	38	40	0,160	125
QC-1 (TI)	Titanium	38	35	0,074	125



APSC-1
Adjustable sliding adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT RANGE [mm]	MAXIMUM USER WEIGHT [kg]
APSC-1 (SS)	Stainless steel	42	65	0,283	-10 to +10	125
APSC-1 (AL)	Aluminum	44	67	0,160	-10 to +10	125
APSC-1 (TI)	Titanium	44	67	0,173	-10 to +10	125



APSP-1
Adjustable sliding adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT RANGE [mm]	MAXIMUM USER WEIGHT [kg]
APSP-1 (SS)	Stainless steel	42	65	0,280	-10 to +10	125
APSP-1 (AL)	Aluminum	44	67	0,150	-10 to +10	125
APSP-1 (TI)	Titanium	44	67	0,153	-10 to +10	125



AZ-P25
Clamp-type connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AZ-P25 (SS)	Stainless steel	48	44	0,110	125
AZ-P25 (AL)	Aluminum	43	47	0,083	125
AZ-P25 (TI)	Titanium	44	49	0,067	125



AZ-C25
Clamp-type connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AZ-C25 (SS)	Stainless steel	48	44	0,130	125
AZ-C25 (AL)	Aluminum	43	47	0,083	125
AZ-C25 (TI)	Titanium	42	48	0,076	125



AKZ-1

Angled clamp-type connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT ANGLE [°]	MAXIMUM USER WEIGHT [kg]
AKZ-1(SS)	Stainless steel	42	52	0,127	10	125
AKZ-1(TI)	Titanium	42	52	0,081	10	125



AKZ-2

Angled clamp-type connecting adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	ADJUSTMENT ANGLE [°]	MAXIMUM USER WEIGHT [kg]
AKZ-2(SS)	Stainless steel	44	60	0,188	20	125
AKZ-2(TI)	Titanium	44	60	0,115	20	125



AZP-1

Adjustable sliding adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	OFFSET [mm]	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AZP-1(AL)	Aluminum	10	50	50	0,075	125



AZP-2

Adjustable sliding adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	OFFSET [mm]	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AZP-2(AL)	Aluminum	5	45	53	0,099	125

09 FOOT ADAPTERS



AS-1

Foot adapter

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AS-1(SS)	Steel Aluminum	68	70	0,134	125
AS-1(TI)	Titanium	65	70	0,093	125
AS-1(AL)	Aluminum	65	70	0,108	125



AO-V1
Rotational adapter

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
AO-V1 (SS)	Stainless steel	63	44	0,256	125
AO-V1 (TI)	Titanium	63	44	0,160	125



D-TKR-02
Rotational adapter

2-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	ROTATION ANGLE [°]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
D-TKR-02	Stainless steel, Aluminum Alloy	360°	36,2	0,180	125

11 LOCKS



ZC-W1
Waterproof locking system

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ZC-W1	Stainless steel	68	60	0,310	125



ZC-W2
Waterproof locking system

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ZC-W2	Stainless steel	68	60	0,310	125



ZP-W1
Waterproof locking system

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ZP-W1	Stainless steel	65	58	0,308	125



ZP-W2
Waterproof locking system

Waterproof

3-Year Warranty

PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ZP-W2	Stainless steel	65	58	0,300	125



ZPL-W1
Waterproof locking system



PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
ZPL-W1	Stainless steel	86	58	0,230	125



PIN
Prosthetic suspension pin



PRODUCT, TYPE, MODEL	MATERIAL	WIDTH [mm]	HEIGHT [mm]	PRODUCT WEIGHT [kg]	MAXIMUM USER WEIGHT [kg]
PIN4.8	Stainless steel	14,9	48	0,018	125
PIN5.8	Stainless steel	14,9	58	0,020	125
PIN6.8	Stainless steel	14,9	68	0,022	125
PIN7.8	Stainless steel	14,9	78	0,025	125
PIN8.8	Stainless steel	14,9	88	0,027	125
PIN9.8	Stainless steel	14,9	98	0,031	125

12 ORTHOPEDIC TEXTILES



SHOULDER SUSPENSION SYSTEM FOR UPPER LIMB PROSTHESIS (ORT-N-SR / ORT-N-SL)
(Sizes S, M, L, XL, XXL)



SIZE	S	M	L	XL	XXL
BICEP CIRCUMFERENCE, CM	28-32	32-36	36-40	40-44	44-48
MAXIMUM DEFLECTION NOT EXCEEDING, MM	±5	±5	±5	±5	±5



SHOULDER-ELBOW SUSPENSION SYSTEM FOR UPPER LIMB PROSTHESIS (ORT-N-ER / ORT-N-EL)
(Sizes S, M, L, XL)



SIZE	S	M	L	XL
WAIST CIRCUMFERENCE, CM	23-24	24-25	26-27	28-29
HIP CIRCUMFERENCE B, CM	22	22	22	22
MAXIMUM DEFLECTION NOT EXCEEDING, MM	±5	±5	±5	±5



HIP SUSPENSION BELT FOR LOWER LIMB PROSTHESIS (ORT-N-U1)

(Sizes S, M, L, XL, XXL, XXXL)



1-Month Warranty

SIZE	S-M-L	XL-XXL-XXXL
WAIST CIRCUMFERENCE, CM	70-95	95-130
HIP CIRCUMFERENCE B, CM	34-44	44-54
MAXIMUM DEFLECTION NOT EXCEEDING, MM	±5	±5




COMFORT

Knee orthosis



1-Month Warranty

Anthracite		Beige / Leather	
Reference number	Size	Reference number	Size
12 6-CS-1A-330-S	S	12 6-CS-1B-330-S	S
12 6-CS-1A-330-M	M	12 6-CS-1B-330-M	M
12 6-CS-1A-330-L	L	12 6-CS-1B-330-L	L

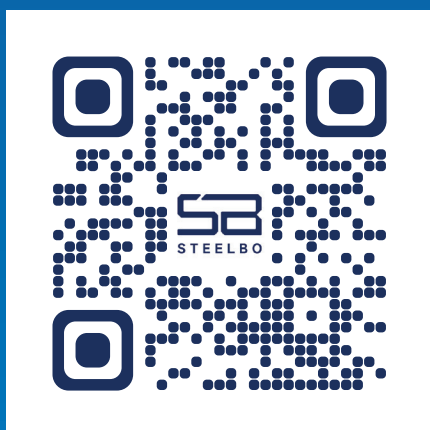

CONTACT US

☎ +48 690 524 907

✉ info@steelbo.global / sprzedaz@steelbo.global

🌐 <https://steelbo.global>

📍 Poland, Wałbrzych, Ludowa Street 61 F. 58-304